



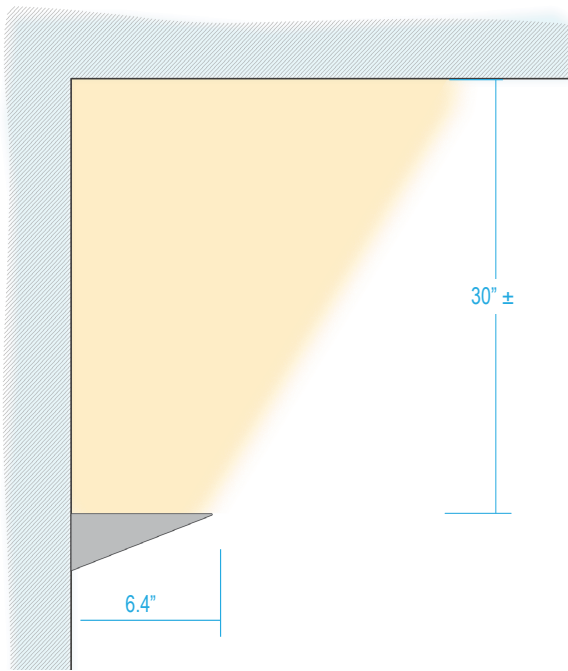


Luminous Intensity Distribution

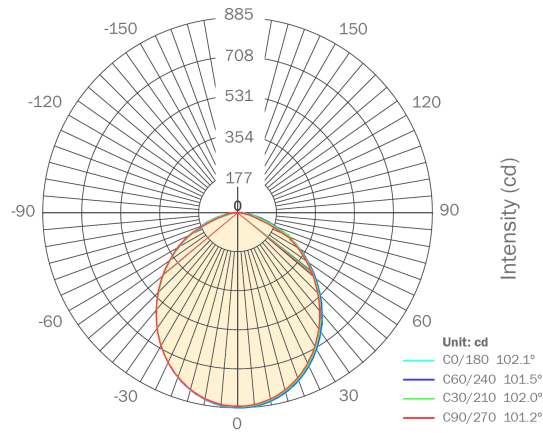

Section - Light Spread Pattern

CCT Setting (K)	Delivered Lumens	Wattage	Efficacy (lm/W)	CRI
2200K	2247K	29.04	66.7	92.7
2700K	2741K	29.13	75.1	94.3
3000K	3126K	29.21	79.1	94
3500K	3483K	29.2	82.4	92.5


Overall Dimensions:	8.0 x 6.4 x 3.0 inches (203 x 162 x 75mm)
Lamping:	Includes integrated LED with Switchable Color Temperature
Input Power:	120-277Vac, 50/60Hz.
Dimming:	0-10v dims to 1% of light on 120V or 277V; ELV or Triac dims to 10% of light on 120V only. ELV or Triac does not dim on 277V.
Includes:	Luminaire, Installation Bracket, Driver Install Tool
Shade Material	Powder coated aluminum
Diffuser Material:	Frosted acrylic
Mounting Locations:	ETL Listed for damp locations. Not suited for external application.

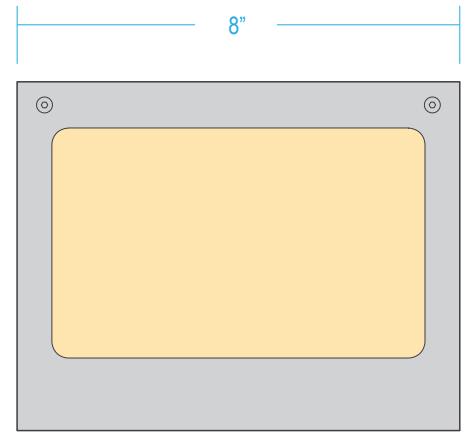

Top View



Front View

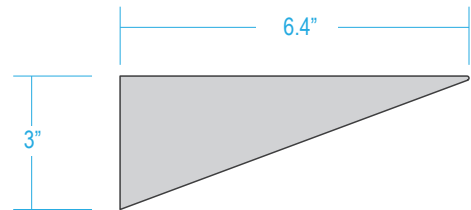

Side View


Dimensions



ETL Listed



Warranty

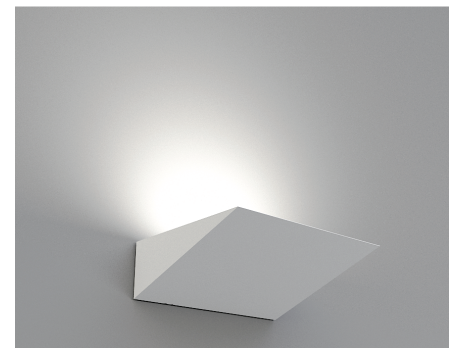

LIGHT LIGHT
FIXTURES

Point Sconce
Specifications Sheet