



**Section** - Light Spread Pattern



**Top View**

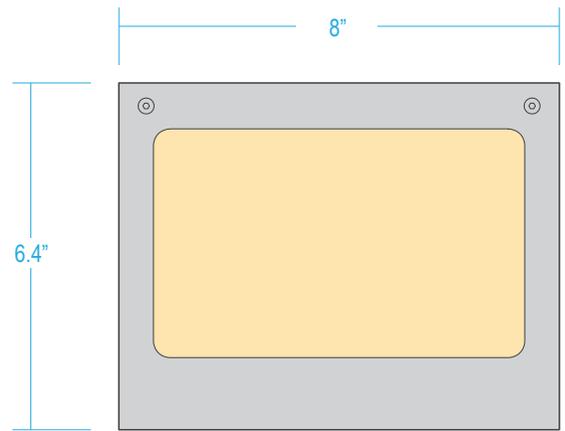

**Front View**

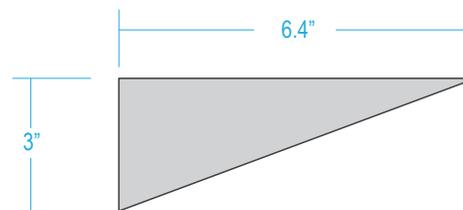

**Side View**

**Dimensions**

## Light Output

CCCT Setting (K)	Measured CCT (K)	Wattage	Luminous Flux (lm)	Efficacy (lm/W)	CRI
2200K	2247K	29.04	1933.3	66.7	92.7
2700K	2741K	29.13	2189.1	75.1	94.3
3000K	3126K	29.21	2311.8	79.1	94
3500K	3483K	29.2	2405.7	82.4	92.5

Overall Dimensions:	8.0 x 6.4 x 3.0 inches (203 x 162 x 75mm)
Lamping:	Includes integrated LED with Switchable Color Temperature
Dimming:	Triac, ELV, 0-10V
Includes:	Luminaire, Installation Bracket, Driver Install Tool
Shade Material	Powder coated aluminum
Diffuser Material:	Frosted acrylic
Input Power:	120-277Vac, 50/60Hz.
Mounting Locations:	Wall junction box. Up Light. DRY LOCATION ONLY.
ETL Listed:	Luminaires [UL 1598:2021 Ed.5+R:31Jan2024] Luminaires [CSA C22.2#250.0:2021 Ed.5+U1;U2]

